

## **Analogue KNZD-63 Clean Room Phone**



### **DESCRIPTION ITEM NO.:ZD0630012**


1. Plastic material body for easy Installation.
2. Waterproof rating IP55 dust proof.
3. Full keypad with memory, 10 button programmable speed-dial telephone.
4. Weather resistant to IP55 standard, service temperature range from -30 degree to +75 degree.
5. Lightening protection to ITU-T recommendation K.21.
6. Flat keypad keep waterproof and dusty proof.
7. Phone integrity wiring to enable the telephone system to check if the telephone unit is still Operational. (If PABX have this available we can provide this function).
8. Auto release the line if the other side end call. This function upon buyer's requirement).
9. Can wipe with IPA, medicinal liquid.
10. Telephone line powered.
11. Application: Clean room, pharmaceutical factory, hospital, chemical plant etc.



## SPECIFICATION

1. PSTN analogue telephone
2. DTMF dialing
3. MTBF:100000hours
4. MTTR: 2 hours
5. Connection: RJ11 screw terminal pair cable
6. Applicable for various types of SPC exchange PABX and dispatching exchange system with feeding voltage of 33-60V.
7. Ambient temperature:-30 ~ +60 degree. Relative humidity:10%~95%  
Atmospheric pressure: 86~106Kpa Circumstance noise:less than 60dB(A)
8. Sound level of ringing:over 70dB(A).
9. Standard frequency:low frequency group:697. 770. 852. 941Hz,  
high frequency group:1209. 1336. 1477Hz, frequency deviation:-1.5% ~ +1.5%
10. Call transmission index:(5KM)SLR<12,RLR<-1,STMR>10, output impedance is 600 Ohm.  
maximum distance: 7KM
10. Super strong function is available for dialing 3 groups of numbers stored in the memory  
(maximum length of each number is 16 digits)
11. Connection: RJ11 screw terminal pair cable (or RJ11 Socket of plug upon request)  
with stainless steel cable protected

## INSTALLATION

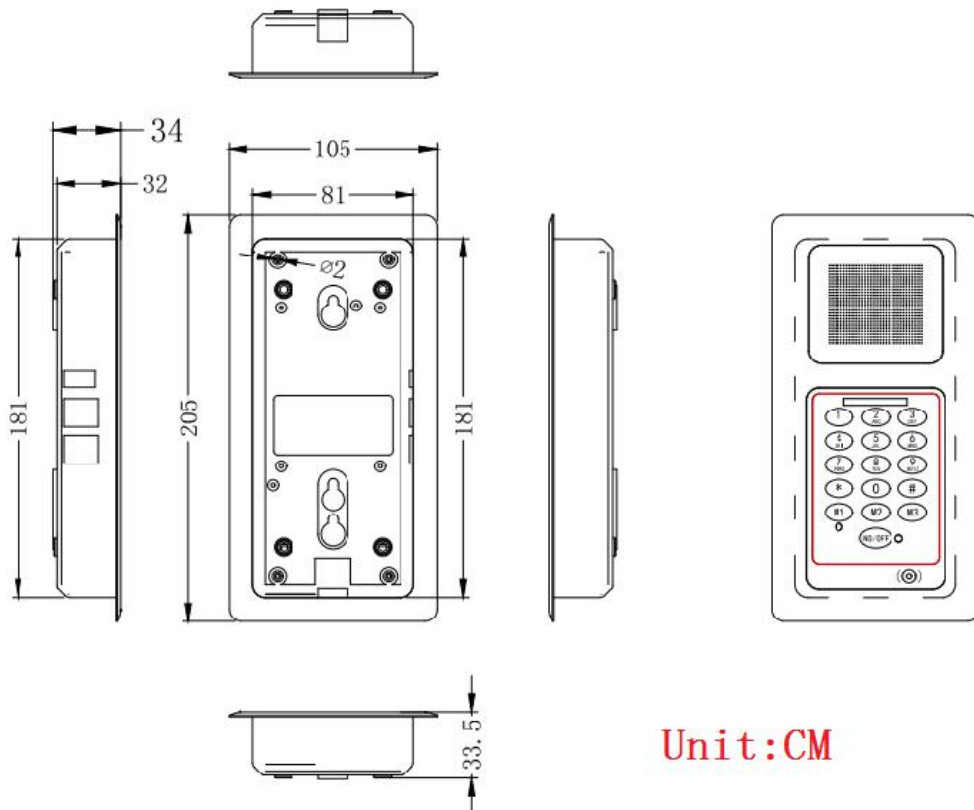

Unit:CM

## CERTIFICATION

EN55022: emissions

EN55024: immunity

Ingress Protection: GB4208-93 IP66 FCC

ITU-T Recommendations K21

EMC: EN50121(Railway application-Electromagnetic Compatibility)



RoHS

## PACKING



Unit size:105\*205\*32mm Unit: N.W:0.3KG

1pcs packing box size: 33\*14\*9mm Unit: N.W:0.3KG Unit G.W:0.58KG

5pcs in 1 outer Carton box: size: 340\*310\*150mm N.W:1.5KGG.W:1.98KG




## Hospital Intercom System

### ◆ Medical intercom

#### Main Funtion

- \*Instant voice intercom
- \*Paging and notification
- \*Ip pbx unified management

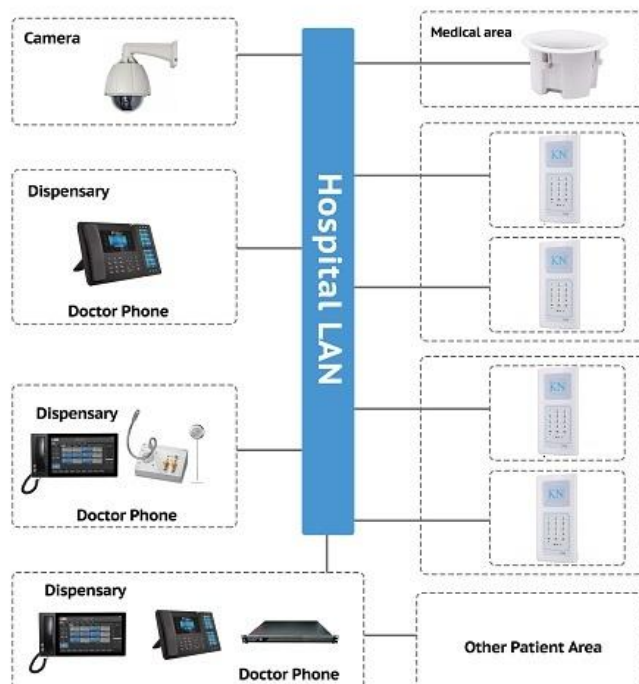



**HONGKONG KOON TECHNOLOGY LTD**

TEL:0086755 29790158/27448753 Fax:0086755 29790278  
Email:marketing@koontech.com www.koontech.com