

VoIP Cleanroom Telephone



DESCRIPTION ITEM NO.ZD0630022

1. Plastic material body for easy Installation.
2. Waterproof rating IP55 dust proof.
3. Full keypad with memory, 10 button programmable free-dial telephone.
4. Hands-free button, 3w loudspeaker.
5. Lightning protection to ITU-T recommendation K.21.
6. POE power supply or DC12v.
7. Temperature range from -40 degree to +70 degree.
8. Support echo cancellation.
9. Remote software upgrade, configuration and monitoring.
10. Optional 7 minute time out to release the line if the other side hang up. This function upon buyer's requirement).
11. Can wipe with IPA.
12. Application: Clean room, pharmaceutical factory, hospital, chemical plant etc.




SPECIFICATION

VoIP SIP2.0 telephone DTMF dialing
 MTBF:100000hours MTTR: 2 hours
 Free dial(maximum length of each number is 16 digits)
 Communication: Full duplex 2-way hands-free communication
 Call Control Signaling:VOIP SIP Info(DTMF), RFC 2833(DTMF)
 Power:Power over Ethernet, IEEE802.3af, Class 0
 Local power, 12VDC,Idle 2W, Max 10W
 Auxiliary Contacts:1 Aux Output, dry contact
 Contact Ratings. Load: Resistive load
 Rated load:0.3 A at 125 VAC; 1 A at 30 VDC
 Rated carry current:1A
 Max.switching voltage:125 VAC,60VDC
 Max.switching current:1A

Audio Codes:G.711, G.722, G.729
 Network:10/100 BaseTX Ethernet, RJ45 connectors, Cat5e or better
 IP Protocols:IPv4, TCP, UDP, TFTP, RTP, RTCP, DHCP, SIP
 LAN Protocols:Power over Ethernet(PoE,802.3af), WLAN(IEEE 802.3af), Network Access Control(IEEE 802.1x),STP(IEEE 802.1d), RSTP(IEEE 802.1d-2004)
 Programming:Non-volatile flash memory programming and configuration through Web GUI
 Management and Operation:DHCP and static IP, remote automatic software upgrade, centralized monitoring, status LED
 Echo cancellation code:G.167/G.168

INSTALLATION

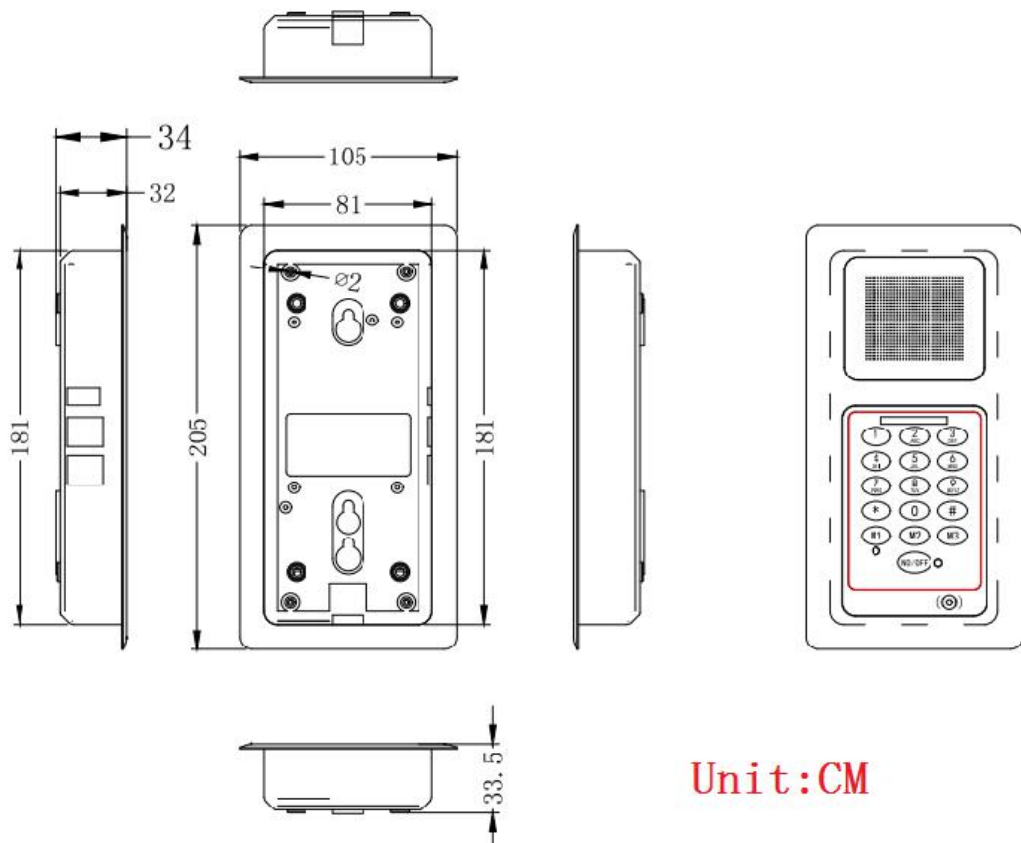

CERTIFICATION

RCM: AS/NZS CISPR 32 Australian communications:AS/CAS004
 Australian Equipment-safety: AS/NZS 60950.1:2015
 EMC: EN50121(Railway application-Electromagnetic Compatibility)



RoHS

PACKING



Unit size:105*205*32mm Unit: N.W:0.3KG

1pcs packing box size: 33*14*9mm Unit: N.W:0.3KG Unit G.W:0.58KG

5pcs in 1 outer Carton box: size: 340*310*150mm N.W:1.5KG G.W:1.98KG




Hospital Intercom System

◆Medical intercom

Main Funtion

- *Instant voice intercom
- *Paging and notification
- *Ip pbx unified management

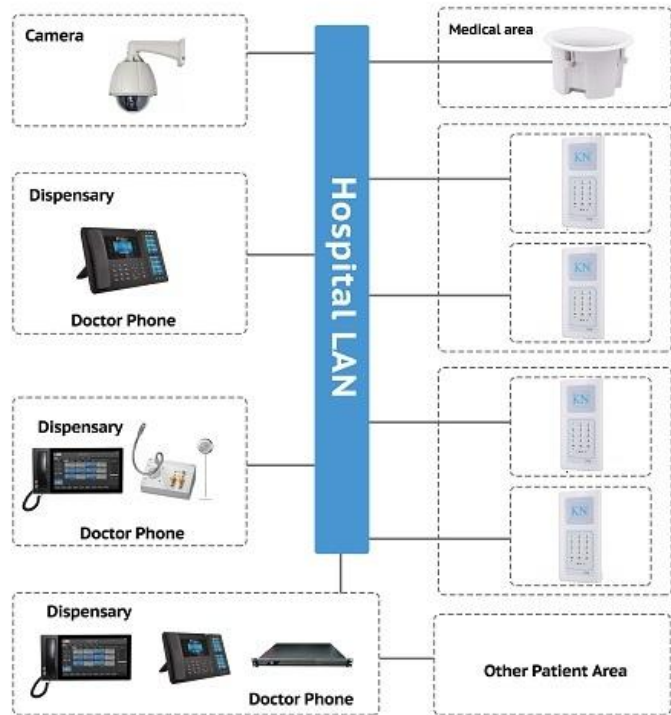

HONGKONG KOON TECHNOLOGY LTD

TEL:0086755 29790158/27448753 Fax:0086755 29790278
Email:marketing@koontech.com www.koontech.com

